

— INTRODUCING —

OUR LOW EMISSION CARPET ADHESIVE




**Excellent early grab means that
carpets can be installed in as
little as 5 minutes**



THINK RED. TRUST ARDEX.

LOW EMISSION CARPET ADHESIVE

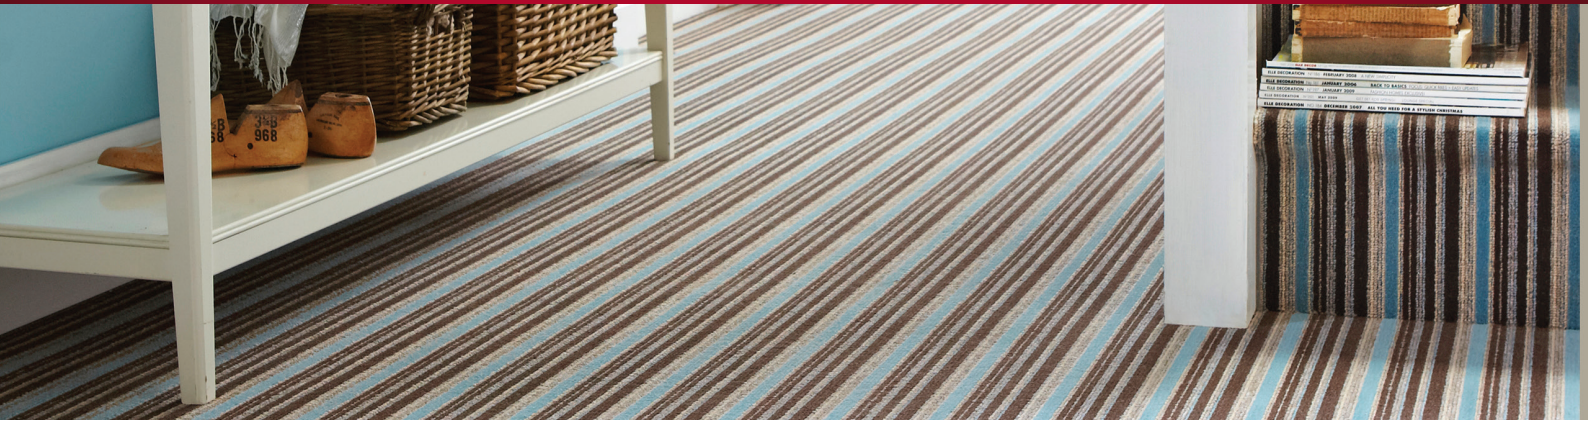

ARDEX AF 325

- Up to 30 minute extended working time
- Rapid strength development
- High temperature resistance, suitable for use over underfloor heating systems
- Ideal for use with the double stick method, in conjunction with ARDEX AF 825 Tackifier
- Solvent free
- Low odour
- Covers up to 35m²



Suitable for:



Woven



Actionbac



Latex



Gel Foam



Needle Punch/Fibre Bonded



PVC



Secondary Backed



Felt

INSTALLATION SCHEDULE



Textile Flooring

LEGEND:

AIRING TIME:

The time the adhesive must be left open before applying the floorcovering.

WORKING TIME:

The time in which the adhesive can receive the floorcovering, after the initial airing time.

OPEN TIME:

The combination of airing and working time.

*Times dependent on the absorbency of the subfloor and site conditions.



ARDEX Flooring Adhesives meet the requirement guidelines for the EMICODE licence 'EC1 PLUS', achieving the lowest possible, or very low emission limits.

ARDEX AF 325 PLUS is part of the ARDEX Flooring Adhesive range, for further information or to view our Technical Datasheets please visit www.ardex.co.uk



THINK RED. TRUST ARDEX.



01440 714939

ardex.co.uk