

STYLISH COMMERCIAL LVT



LIBERTY
FLOOR SOLUTIONS



Urban 55 Collection

STYLISH COMMERCIAL LVT



6341 04 BAYVIEW STONE



6341 05 LAKESHORE STONE



6342 03 HUNTERS POINT OAK



6342 01 EXCELSIOR OAK



6342 02

MONASTERY OAK



6342 04 MISSION BAY OAK



6342 08 CHESTNUT OAK



6342 16 ASHBURY GREY OAK



6342 15 FOREST KNOLLS OAK



6342 23

RURAL OAK



6342 17 RIVERSIDE OAK



6342 24 BOARDWALK OAK



LIBE0035

NORDIC SUMMER OAK



LIBE0033

RIVIERA OAK



LIBE0034

WARM RUSTIC OAK



LIBE0030


REGAL OAK



BAYVIEW STONE 6341 04	LAKESHORE STONE 6341 05	HUNTERS POINT OAK 6342 03	EXCELSIOR OAK 6342 01	MONASTERY OAK 6342 02	MISSION BAY OAK 6342 04	CHESTNUT OAK 6342 08	ASHBURY GREY OAK 6342 16
FOREST KNOLLS OAK 6342 15	RURAL OAK 6342 23	RIVERSIDE OAK 6342 17	BOARDWALK OAK 6342 24	NORDIC SUMMER OAK LIBE0035	RIVIERA OAK LIBE0033	WARM RUSTIC OAK LIBE0034	REGAL OAK LIBE0030

Urban 55 Collection

Neo & Herringbone

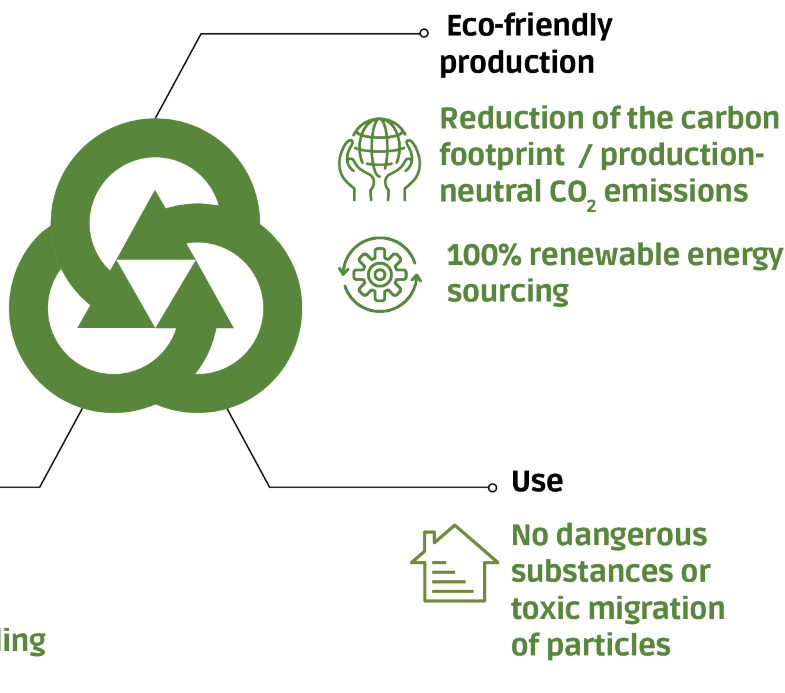


Better Air Quality

Volatile organic compounds called VOCs or TVOC are harmful substances frequently found emitted into the air within indoor environments. The LIBERTY Urban 55 Neo collection emits 10 times less TVOC than the permitted standard (< 100 µg/m³).

Urban 55 Collection

Neo & Herringbone

Neo & Herringbone			
CLASSIFICATION			
Product Standard	EN ISO 10582	-	Heterogenous floor covering
European Classification	EN ISO 10874	-	
UPEC classification	QB 30	-	
			U3 P3 E2* C2 (N° 702/302) * Depending on support
CHARACTERISTICS			
Dimensions (planks)	EN ISO 24342	cm	20.80 x 124.30
Dimensions (tiles)	EN ISO 24342	cm	49.65 x 99.65
Dimensions (herringbone)	EN ISO 24342	cm	61.35 x 10.23
Overall thickness	EN ISO 24346	mm	2.50
Wear layer thickness	EN ISO 24340	mm	0.55
Surface treatment	-	-	Polyurethane
Abrasion resistance	EN 660-2	mm ³	≤ 2 (Group T)
Binding agent content	EN ISO 10582	-	Type I
Total weight	EN ISO 23997	g/m ²	3850 Neo 4500 Herringbone
PERFORMANCES			
Dimensional stability	EN ISO 23999	%	≤ 0,10 (norm ≤ 0.25)
Fire behaviour	EN 13501-1	-	Rank Bfl-s1
Impact sound reduction	EN ISO 717-2	dB	4
Residual indentation	EN ISO 24343-1	mm	≤ 0,10
Castor chair suitability	ISO 4918	-	25 000 cycles (without damage)
Slip resistance	DIN 51130	-	Group R10
Slip resistance (coef)	EN 13893	-	Rank DS (≥ 0.30°)
Colour fastness to artificial light	EN ISO 105-B02	-	> 6 degrees
Chemical resistance	ISO 26987	-	Good
Thermal conductivity	EN ISO 10456	W/m.k	0.25
Underfloor heating	EN 12524	-	Suitable (≤ 27 °C)
Electrical behaviour	EN 1815	kV	< 2 Antistatic
ENVIRONMENT			
VOC Emissions at 28 days	ISO 16000-6	µg/m ³	< 10 / A+
Formaldehyde at 28 days	ISO 16000-3	µg/m ³	E1 - Not detected
European rules	1907/2006/CE	-	Compliant
DESCRIPTION			
Product description	100% phthalate-free PVC (excluded recycled content) flooring in planks, tiles and herringbones. The surface is polyurethane-treated for ease of maintenance. 4 sides bevel.		
Usage tips	Residential interiors, as well as heavy commercial use within retail, office, leisure, healthcare and educations sectors.		
Guarantee	10 years for commercial use, 15 years for residential use, conditional on recommended installation and maintenance.		
PACKAGING			
Box of Neo: 14 planks 20.80 x 124.30 cm = 3.62 m ² / 8 tiles 49.65 x 99.65 cm = 3.96 m ² Box of Herringbone: 48 planks 613.5 x 102.25 cm = 3.01m ²			
IMPLEMENTATION - MAINTENANCE TIPS			
www.liberty-floor.com			

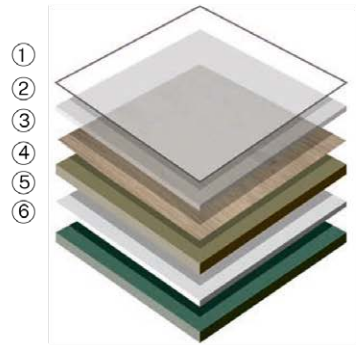


Structure

- ① Polyurethane treatment PUR | **Easy maintenance**
- ② Wear layer 0.55 mm - Class 33/42 | **Heavy commercial**
- ③ Design | **Realistic Design & colours**
- ④⑤⑥ Calendered PVC | **Resistant to indentation**



EN 14041 : 2004





LIBERTY[®]

FLOOR SOLUTIONS