

CLICK FIT LAMINATE FLOORING




# Xpressions 8 Ville Herringbone

CLICK FIT LAMINATE FLOORING

# Xpressions 8 Ville Herringbone

megaloc

 twin



Anti  
Bacterial



Realistic  
decor



PVC  
free




Extremely  
resistant



Embossed  
in register



Water  
resistant



GROOVE

4V groove

Carbon-negative  
production based on  
highly efficient  
industrial  
processes




Exclusive product-  
design consistently  
oriented  
towards  
recycling



Fully integrated  
production-process  
on 1 site



Choose from exclusive  
designs and colours

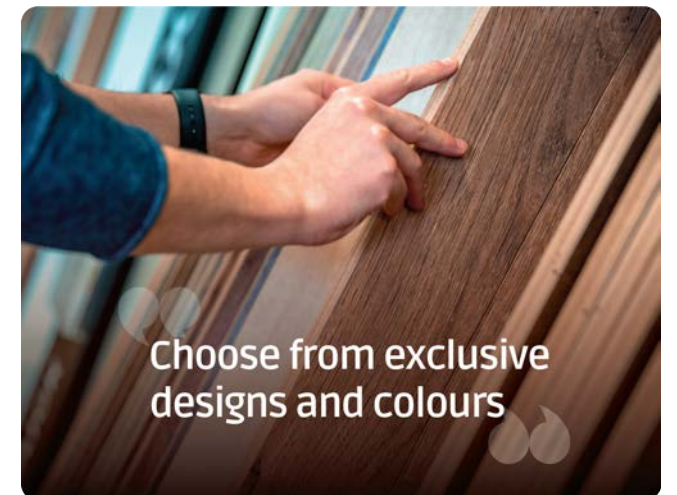





ROTTERDAM

44480-64111





VALENCIA

44498-63274





GIRONA

44496-65338





NAPLES

44492-66702





VENICE

44494-63279





HAMBURG

44482-64112





**VALENCIA**

**VENICE**

**ROTTERDAM**

**HAMBURG**

**GIRONA**

**NAPLES**

**44498-63274**

**44494-63279**

**44480-64111**

**44482-64112**

**44496-65338**

**44492-66702**






|                                                                                                       |                     |                                                                      |
|-------------------------------------------------------------------------------------------------------|---------------------|----------------------------------------------------------------------|
| Standards                                                                                             |                     | Xpressions 8 Ville Herringbone                                       |
| CLASSIFICATION                                                                                        |                     |                                                                      |
| Product Performance                                                                                   | EN 13329            | AC-5                                                                 |
| European Classification                                                                               | DIN EN 13329        | 32                                                                   |
| PERFORMANCE                                                                                           |                     |                                                                      |
| Fire Reaction                                                                                         | EN 13501-1          | Cfl-s1                                                               |
| Abrasion Resistance                                                                                   | EN 13329            | ≥ 6000 cycles                                                        |
| Impact Resistance                                                                                     | EN 17368   EN 13329 | small -diameter ball ≥ 35 mm   large -diameter ball ≥ 750 mm         |
| Residual Indentation                                                                                  | EN ISO 24343-1      | ≤ 0.05 mm                                                            |
| Castor Chair Resistance                                                                               | EN 425              | no damage with type W after 25 000 cycles                            |
| Furniture Leg Resistance                                                                              | EN ISO 16581        | no damage with type 0                                                |
| Slip Resistance                                                                                       | EN 13893            | DS                                                                   |
| Stain Resistance                                                                                      | EN 438-2            | Class 5 (group 1 and 2), Class 4 ( group 3)                          |
| Thermal Conductivity                                                                                  | EN 12667            | ≥ 0.075 W/mK                                                         |
| Thermal Resistance                                                                                    | EN 12667            | R ≤ 0.06 (m²K)/W                                                     |
| Electrostatic Behaviour                                                                               | EN 1815             | ≤ 2 kV                                                               |
| ENVIRONMENT                                                                                           |                     |                                                                      |
| VOC Emissions                                                                                         | ISO 160001-6        | A+                                                                   |
| Formaldehyde                                                                                          | ISO 16516           | E1                                                                   |
| Formaldehyde Emissions                                                                                |                     | US EPA TSCA Title VI / CARB P 2                                      |
| DESCRIPTION                                                                                           |                     |                                                                      |
| Product Description                                                                                   |                     | Herringbone Laminate flooring with Megaloc Twin Click-System         |
| Usage Type                                                                                            |                     | Class 32: domestic and moderate commercial use                       |
| Guarantee                                                                                             |                     | 10 years for heavy domestic use, 5 years for moderate commercial use |
| CONDITIONING                                                                                          |                     |                                                                      |
| Xpressions 8 Ville Herringbone box of 14 planks - 643mm x 131mm x 8mm = 1.179m² (96 boxes per pallet) |                     |                                                                      |
| IMPLEMENTATION - MAINTENANCE TIPS                                                                     |                     |                                                                      |
| WWW.LIBERTY-FLOOR.COM                                                                                 |                     |                                                                      |

Patented Click System

megaloc


twin



- ① 4 Sided Bevel
- ② Overlapping Bevels
- ③ Durable Force Locking Connection
- ④ Moisture Resistant Joint



Installation Demo







**LIBERTY<sup>®</sup>**

FLOOR SOLUTIONS

**Wood sourced from  
sustainable and  
certified forestry**

